

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



16 DEC 2004



(43) International Publication Date
31 December 2003 (31.12.2003)

PCT

(10) International Publication Number
WO 2004/001249 A1

(51) International Patent Classification⁷: **F16D 1/10**, 11/14

(21) International Application Number:

PCT/EP2003/006369

(22) International Filing Date: 17 June 2003 (17.06.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:

MI2002A001352

19 June 2002 (19.06.2002) IT

(71) Applicant (for all designated States except US): **ASTER-IKA LIMITED** [CY/CY]; Pikioni 4, P.C. 3075 Limassol (CY).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DOUGLAS, James, Morley, Hulme** [—/—]; Clairmont Jerbourg Road, St. Martins, Guernsey, Channel Islands (GB).

(74) Agent: **AVV. Rapisardi Mariacristina; UFFICIO BREVETTI RAPISARDI S.r.l.**, Via Srebelloni, 12, I-20122 Milano (IT).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declaration under Rule 4.17:


— of inventorship (Rule 4.17(iv)) for US only

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: CONNECTION DEVICE BETWEEN MEMBERS OF A MACHINE

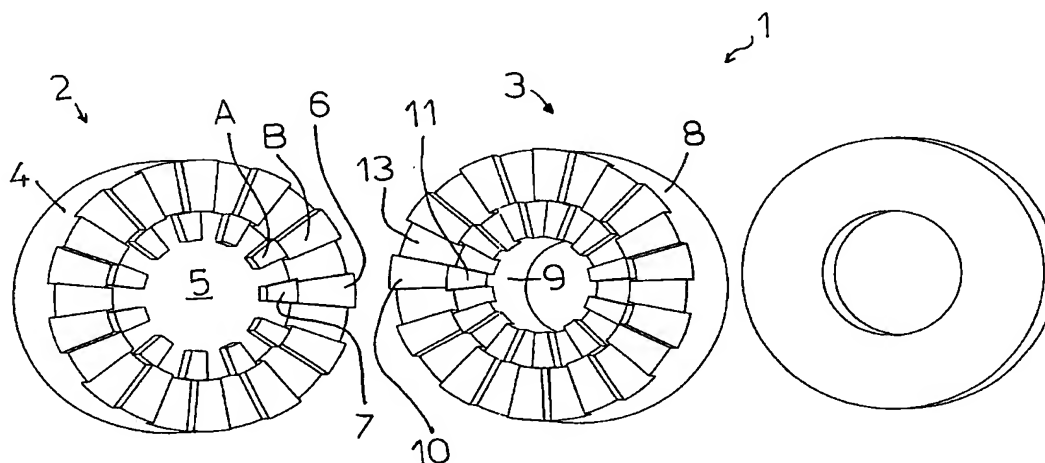

(57) Abstract: Connection device between members of a machine comprising at least one first (2) and one second (3) coupling suitable for being connected together to orientate said members of said machine in work position, the first coupling (2) comprising at least one first (4) and one second (5) toothed elements mutually mobile between an initial reference configuration and a work configuration corresponding to a predetermined orientation of said members of the machine, the second coupling (3) comprising at least two toothed elements (8, 9) fixed together with the initial configuration and mutual displacement means of the second coupling (3) with respect to the first coupling (2) suitable for taking the second coupling (3) into a connection position with the first coupling (2) once the work condition of the first coupling (2) has been reached in correspondence with a small relative displacement between the first (4) and second (5) toothed elements of the first coupling (2) equal to the difference between the sum of the pitch of two or more teeth of the first toothed element (4) of the first coupling and the sum of the pitch of two or more teeth of the second toothed element (5) of the first coupling.